

HIGH RESISTANCE CHEMICAL HOSE



Inside Diameter	Outside Diameter	Bend Radius	Weight LB/FT	Working Pressure PSI
3/4"	1-7/32"	5"	.56	150
1"	1-9/16"	6"	.77	150
1-1/4"	1-7/8"	8"	.94	150
1-1/2"	2-1/16"	9"	1.15	150
2"	2-9/16"	11"	1.47	150
2-1/2"	3-1/16"	13"	1.74	150
3"	3-19/32"	15"	2.45	150
4"	4-7/8"	20"	3.40	150
6"	6-7/8"	48"	6.50	150

Recommended As: Suction and transfer for a wide variety of chemicals and solvents. Will handle 90% of existing chemicals.

Tube: Beige, smooth modified cross-linked polyethylene.

Temperature & Range: Normal maximum recommended operating temperature is 160°F. Intermittent use up to 176°F.

Reinforcement: Spiraled high tensile textile cords, and steel helix wire. For static grounding, helix wire is available.

Cover: Green corrugated abrasion and weather resistant EPDM blend. Designed to resist general chemical and hydrocarbon exposure.

Lengths: Standard 100 ft., also cut and/or coupled to customer's individual requirements.

Couplings: Stainless Steel Cam and Groove, Pipe Nipples, or a combination.


Also available in discharge only.

S
U
C
T
I
O
N
■
T
R
A
N
S
F
E
R

C
H
E
M
I
C
A
L
H
O
S
E



INDUSTRIAL GRADE WATER SUCTION HOSE

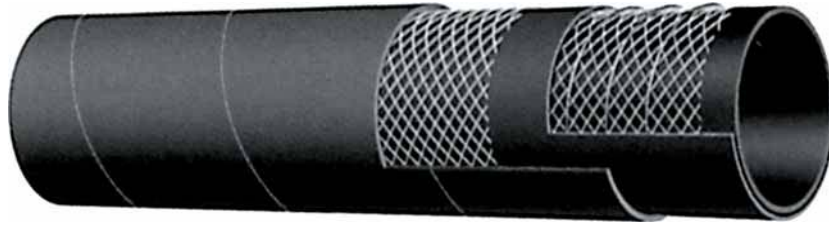

Inside Diameter	Outside Diameter	Bend Radius	Weight LB/FT	Working Pressure PSI
1"	1-3/8"	6"	.52	150
1-1/4"	1-21/32"	7"	.63	150
1-1/2"	1-59/64"	8"	.82	150
2"	2-1/2"	10"	1.15	150
2-1/2"	3"	15"	1.65	150
3"	3-1/2"	18"	2.11	150
3-1/2"	4"	14"	2.37	150
4"	4-19/32"	25"	3.05	150
5"	5-21/32"	29"	3.95	150
6"	6-45/64"	32"	4.55	150
8"	8-45/64"	40"	8.98	150
10"	10-23/32"	50"	10.30	150
12"	21-51/64"	60"	12.40	90

Recommended As: A general service water suction hose for use in construction, mining, & agriculture.

Tube: Black EPDM blended rubber.

Temperature & Range: -40°F to 185°F.

Reinforcement: Spiraled high tensile textile cords, and double steel helix wire.

Cover: Black weather and ozone resistant, EPDM blended rubber.

Lengths: Standard 100 Ft: 1"-6"; Standard 20 Ft: 8" - 10" , also cut and/or coupled to customer's individual requirements.

Couplings: Cam and Groove, Pin Lug Short Shank, Nipples or a combination.

GENERAL PURPOSE

WATER SUCTION HOSE

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com



© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com