

Flexible Solutions

DURAFLEX[™] INC.

for Rigid Applications

HYDROFORMED BELLOWS ASSEMBLIES



Duraflex, Inc.'s Hydroformed Bellows are recognized in the industry as the benchmark for high quality & precision! Bellows can be hydroformed from welded or seamless tubing.

WALL THICKNESS of close tolerance welded tubing is fabricated from .004" to .036" material. Seamless tubing wall thicknesses range from .002" to .020".

INSIDE DIAMETER of Bellows ranges for from ¼" – 24".

LENGTH of Bellows Hydroformed is restricted to a single bellows live length of 36".

NUMBER OF CONVOLUTIONS is dictated by the motion requirements of the application & can range from one convolution to several hundred within a given length.


MULTIPLE PLY bellows configurations can be created to increase pressure ratings or reduce the effect of vibration induced fatigue in both seamless or welded tubing.



MATERIALS COMMONLY HYDROFORMED


- **Aluminum**
 - 3003, others
- **Copper Base Alloys**
 - Beryllium Copper
 - Phosphor Bronze
 - Copper Alloy 102/110
 - Brass 70-30, 80-20
- **Hastelloy**
 - B, B2, C, C-22, C-276
- **Inconel**
 - 600, 601, 617, 625
- **Monel 400**
- **Nickel 200**
- **Stainless Steels | 300 Series**
 - T-304(L) ○ T-321
 - T-316(L) ○ T-347
- **Stainless Steel | 409 Series**
- **Titanium**
 - Grades 1, 2, 40

DURAFLEX, INC.™ | 765 INDUSTRIAL DRIVE, CARY, IL 60013
 PHONE 877.462.1007 | FAX 847.462.1450 | E-MAIL info@duraflexinc.com
 www.duraflexinc.com | 24/7 EMERGENCY | 847.337.9459



© Copyrights 2011 Duraflex, Inc.™ All rights reserved.



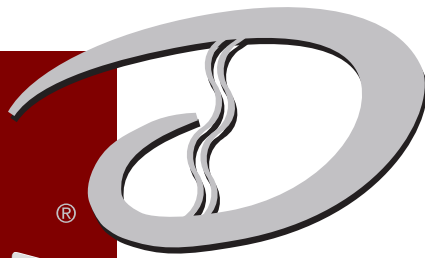

HYDROFORMED BELLOWS ASSEMBLIES

SPECIAL GEOMETRIES or “non-traditional” hydroformed shapes can be created that drastically differ from the typical omega shaped convoluted designs. These can range from shaped cones to elliptical or even rectangular net shape products.

END CONFIGURATIONS range from blind closed ends to typical open tube or bellows necks, as desired. Custom end forms can be created out of similar or dissimilar machined components & joined to the bellows utilizing the most appropriate joining method.

TOOLING is available for almost every Inside Diameter whole number & half size from ¼” to 24”. Special tooling can be designed for unique sizes.

ASSEMBLY options include value-added fabrication & assembly of mating components.

JOINING METHODS for mating componentry includes TiG & MicroTiG welding, Resistance Welding, Laser Welding, Plasma Welding, Brazing, Epoxing & Press Fitting.

INSPECTION can be provided in both Non-Destructive or destructive Metallurgical formats depending on the application. Inspection services include x-ray, dye penetrant testing, SPC, PPAP & 1st Article submittals, metallographic analysis, helium mass spec leak testing, pressure testing, etc – as required for the application.

CERTIFICATIONS include ISO 9001:2000, AS 9100B, ASME Section IX, TUV, MIL & many others.

COMPREHENSIVE DESIGN can be performed by Duralflex taking a project from its application concept to prototype to production concurrently with the customer.

BELLOWS LIFE can be predicted utilizing a variety of predictive & modeling software. Professional Engineer certification & stamping can also be provided, if required.

FINISHING OPERATIONS include Electro polishing, LOX Cleaning, Certified Clean Room cleaning & packaging & a variety of other special cleaning or packaging options.

