


BRAIDED | STANDARD EXHAUST BELLOWS

NOMINAL ID	OVERALL LENGTH
1½"	4.0"
1½"	6.0"
1½"	8.0"
1½"	10.0"
1¾"	4.0"
1¾"	6.0"
1¾"	8.0"
1¾"	9.0"
1¾"	10.0"
1¾"	10 ^{5/16} "
2"	4.0"
2"	6.0"
2"	8.0"
2"	10.0"
2"	10 ^{5/16} "
2 ¼"	4.0"
2 ¼"	6.0"
2 ¼"	8.0"
2 ¼"	10.0"
2 ½"	6.0"
2 ½"	8.0"
2 ½"	10.0"
3"	6.0"
3"	8.0"
3"	10.0"
4"	6.0"
4"	8.0"
4"	10.0"

*Other Sizes Available
 Upon Request!*

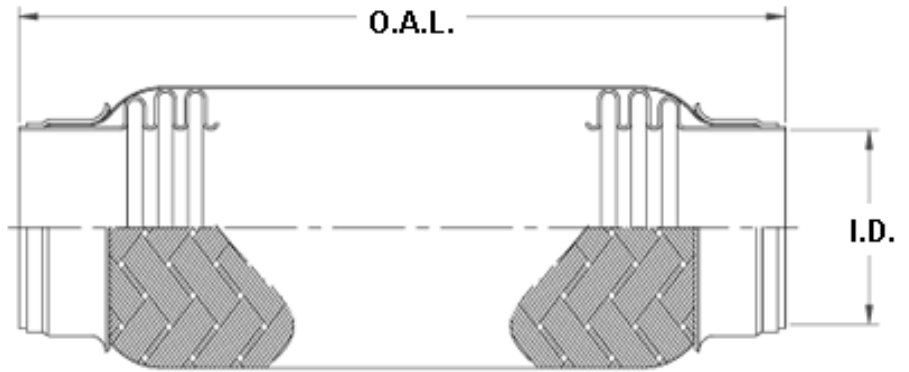

MATERIALS

- Bellows & Braid are 300 SS
Inconel 625 Available
- End Caps are Aluminized Carbon Steel
Stainless Steel Available

BELLOWS CONSTRUCTION

- Multi-Ply
- 2-3 Plies Standard
- Additional Plies Available


BELLOWS TOTAL WALL THICKNESS

- 0.012"
- 0.016"
- .004" — .036" Available


ENDS—RESISTANCE WELD BAND, WELD CAP (or) CUSTOM CONFIGURATION IN ANY MATERIAL:

- Aluminized Carbon Steel
- Stainless Steel
- Inconel



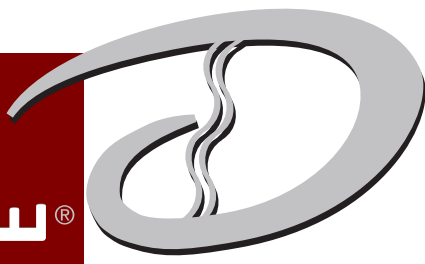

UNBRAIDED | STANDARD EXHAUST BELLOWS

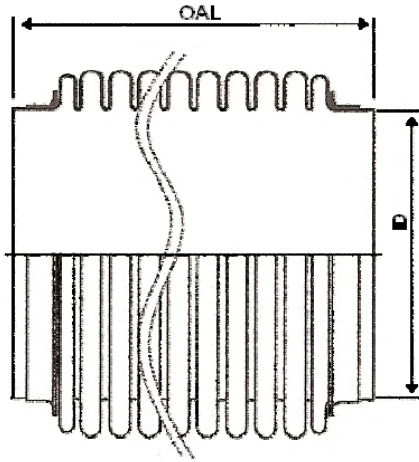

MATERIALS

- Bellows are 300 SS
Inconel 625 Available
- End Caps are Aluminized Carbon Steel
Stainless Steel Available

BELLOWS CONSTRUCTION

- Multi-Ply
- 2-3 Plies Standard
- Additional Plies Available

BELLOWS TOTAL WALL THICKNESS

- 0.012"
- 0.016"
- .004"—.036" Available

NOMINAL ID	OVERALL LENGTH
1½"	4.0"
1½"	6.0"
1½"	8.0"
1½"	10.0"
1¾"	4.0"
1¾"	6.0"
1¾"	8.0"
1¾"	9.0"
1¾"	10.0"
1¾"	11"
2"	4.0"
2"	6.0"
2"	8.0"
2"	10.0"
2"	11"
2¼"	4.0"
2¼"	6.0"
2¼"	8.0"
2¼"	10.0"
2½"	6.0"
2½"	8.0"
2½"	10.0"
3"	6.0"
3"	8.0"
3"	10.0"

NOMINAL ID	OVERALL LENGTH
4"	6.0"
4"	8.0"
4"	10.0"
4½"	6.0"
4½"	8.0"
4½"	10.0"
5"	6.0"
5"	8.0"
5"	10.0"
5½"	6.0"
5½"	8.0"
5½"	10.0"
6"	6.0"
6"	8.0"
6"	10.0"
8"	6.0"
8"	8.0"
8"	10.0"
10"	6.0"
10"	8.0"
10"	10.0"

*Other Sizes Available
Upon Request!*

