


VACUUM CORRUGATED HOSE DURA-SEAL™ CONFLAT SERIES

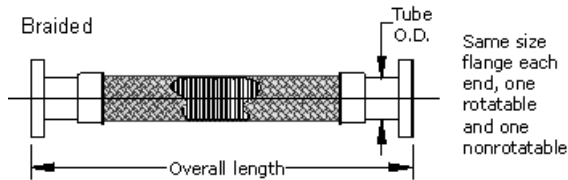

- CONFLAT Flanges
- Medium wall—Braided
- Custom lengths and end fittings available upon customer request.

Nominal Tube OD	Flange Nom.	OAL	Wall Thickness	Static Bend Radius	Spring Rate	Weight (lb.)
3/4	1-1/3	18	.008	3.00	25	3
3/4	1-1/3	24	.008	3.00	19	3
3/4	1-1/3	36	.008	3.00	13	4
3/4	1-1/3	48	.008	3.00	11.5	5
1	2-1/8	18	.009	4.25	38	4
1	2-1/8	24	.009	4.25	28	4
1	2-1/8	36	.009	4.25	18	5
1	2-1/8	48	.009	4.25	16.5	6
1-1/2	2-3/4	18	.011	6.50	56	6
1-1/2	2-3/4	24	.011	6.50	40	7
1-1/2	2-3/4	36	.011	6.50	27	9
1-1/2	2-3/4	48	.011	6.50	25	10
2	3-3/8	18	.012	9.00	85	8
2	3-3/8	24	.012	9.00	63	11
2	3-3/8	36	.012	9.00	40	15
2	3-3/8	48	.012	9.00	34	17
2-1/2	4-1/2	18	.012	10.00	120	10
2-1/2	4-1/2	24	.012	10.00	82	13
2-1/2	4-1/2	36	.012	10.00	67	18
2-1/2	4-1/2	48	.012	10.00	58	22
3	4-5/8	18	.014	11.00	196	15
3	4-5/8	24	.014	11.00	150	19
3	4-5/8	36	.014	11.00	108	23
3	4-5/8	48	.014	11.00	88	27
4	6	18	.014	13.00	142	21
4	6	24	.014	13.00	108	25
4	6	36	.014	13.00	73	27
4	6	48	.014	13.00	80	31

MEDIUM WALL

BRAIDED

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com




© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com

VACUUM CORRUGATED HOSE DURA-SEAL™ CONFLAT SERIES

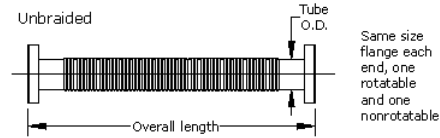

MEDIUM WALL—UNBRAIDED

Nominal Tube OD	Flange Nom.	OAL	Wall Thickness	Static Bend Radius	Spring Rate (lbs/in)	Weight (lb.)
3/4	1-1/3	18	.008	2	23	3
3/4	1-1/3	24	.008	2	17	3
3/4	1-1/3	36	.008	2	11	4
3/4	1-1/3	48	.008	2	10	5
1	2-1/8	18	.009	4	34	4
1	2-1/8	24	.009	4	25	4
1	2-1/8	36	.009	4	16	5
1	2-1/8	48	.009	4	15	6
1-1/2	2-3/4	18	.011	5	51	6
1-1/2	2-3/4	24	.011	5	37	7
1-1/2	2-3/4	36	.011	5	24	8
1-1/2	2-3/4	48	.011	5	22	10
2	3-3/8	18	.012	7.75	78	6
2	3-3/8	24	.012	7.75	57	7
2	3-3/8	36	.012	7.75	37	9
2	3-3/8	48	.012	7.75	33	11
2-1/2	4-1/2	18	.012	8.25	109	7
2-1/2	4-1/2	24	.012	8.25	75	8
2-1/2	4-1/2	36	.012	8.25	61	12
2-1/2	4-1/2	48	.012	8.25	53	14
3	4-5/8	18	.014	9	186	9
3	4-5/8	24	.014	9	112	10
3	4-5/8	36	.014	9	93	13
3	4-5/8	48	.014	9	80	15
4	6	18	.014	11	131	13
4	6	24	.014	11	97	15
4	6	36	.014	11	65	19
4	6	48	.014	11	71	23

THIN WALL—UNBRAIDED

Nominal Tube OD	Flange Nom.	OAL	Wall Thickness	Static Bend Radius	Spring Rate (lbs/in)	Weight (lb.)
3/4	1-1/3	18	.005	1.00	7	3
3/4	1-1/3	24	.005	1.00	5	3
3/4	1-1/3	36	.005	1.00	3	4
1	2-1/8	18	.005	1.40	5	4
1	2-1/8	24	.005	1.40	3	4
1	2-1/8	36	.005	1.40	2	5
1	2-1/8	48	.005	1.40	2	6
1-1/2	2-3/4	18	.006	2.36	8	6
1-1/2	2-3/4	24	.006	2.36	6	7
1-1/2	2-3/4	36	.006	2.36	4	8
1-1/2	2-3/4	48	.006	2.36	4	10
2	3-3/8	18	.006	2.50	9	6
2	3-3/8	24	.006	2.50	6	9
2	3-3/8	36	.006	2.50	4	13
2	3-3/8	48	.006	2.50	4	15

Toll Free: 877-462-1007

Fax: 847-462-1450

24/7 Emergency Service: 847-337-9459

www.duraflexinc.com



© Copyrights 2004-2009 Duraflex, Inc.™ All rights reserved.

765 Industrial Drive

Cary, IL 60013

Em: duraflex@duraflexinc.com

M
E
D
I
U
M
&
T
H
I
N
W
A
L
L

U
N
B
R
A
I
D
E
D